

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>D21H 21/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/37079</b> <b>(43) International Publication Date:</b> 9 October 1997 (09.10.97)
<b>(21) International Application Number:</b> PCT/SE97/00467 <b>(22) International Filing Date:</b> 20 March 1997 (20.03.97) <b>(30) Priority Data:</b> 9601225-7 29 March 1996 (29.03.96) SE <b>(71) Applicant (for all designated States except US):</b> STORA KOPPARBERGS BERGSLAGS AKTIEBOLAG (publ) [SE/SE]; Åsgatan 22, S-791 80 Falun (SE). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> HÅKANSSON, Philip [SE/SE]; Vintervägen 9, S-294 37 Sölvesborg (SE). <b>(74) Agent:</b> HYNELL, Magnus; Hynell Patenttjänst AB, Patron Carls väg 2, S-683 40 Hagfors (SE).		<b>(81) Designated States:</b> AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>
<b>(54) Title:</b> SIZE COMPOSITION, METHOD FOR ITS PREPARATION, AND USE THEREOF  <b>(57) Abstract</b>  A size composition in the form of an aqueous emulsion or dispersion comprises hydrophobic cellulose-reactive particles, which exist as a physical mixture of at least two hydrophobic, cellulose-reactive sizing agents, comprising alkyl keten dimer (AKD) and alkenyl succinic acid anhydride (ASA) as well as starch and/or synthetic polymer.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## SIZE COMPOSITION, METHOD FOR ITS PREPARATION, AND USE THEREOF

## TECHNICAL FIELD

- 5 The invention relates to a new composition which is useful as a so called size composition in connection with manufacturing of paper, board, paper board and similar products. The invention also relates to a method for the preparation of the said composition and to a use thereof, namely in connection with a method for the manufacturing of sized paper, sized board, or sized paper board. Finally, the invention relates to sized paper,  
10 sized board, or sized paper board, wherein the paper, board or paper board has been manufactured according to the said method.

- More precisely, the invention relates to a composition in the form of an aqueous (water based) emulsion or dispersion comprising at least any hydrophobic, cellulose-reactive  
15 sizing agent and at least a natural and/or synthetic polymer.

## BACKGROUND OF THE INVENTION

- As far as most paper, board and paper board grades are concerned, there is a need to reduce the rate of liquid penetration into the structure of the paper, board, or paper board  
20 through the addition of hydrophobic substances during the paper manufacturing process. Copying paper, writing and printing papers, papers for so called ink-jet printers, and paper board for packages for juice, milk and other liquids are examples of such paper, board, and paper board grades.

- 25 These grades for their proper use need to have some liquid repellent features. Different methods are available for the achievement of that effect. One of them includes the addition of an emulsion for dispersion of a hydrophobic material during the paper manufacturing process.

- 30 Aqueous emulsions and dispersions of hydrophobic cellulose-reactive type are previously known per se. These emulsions and dispersions, however, are manufactured of only a single hydrophobic, cellulose-reactive sizing agent.


- Many different hydrophobic materials can be used. The so called hydrophobic, cellulose-reactive sizing agents belong to the most efficient ones. It is believed that the hydrophobic effect, when using that type of agent, is achieved through a reaction between  
35 the hydrophobic material and the hydroxyl groups of the cellulose.

The hydrophobic, cellulose-reactive materials which are most commonly used in connection with neutral or weakly alkalic conditions during the paper or paper board manufacturing process are alkyl keten dimer (in the following called AKD) or alkenyl succinic acid anhydride (in the following called ASA).

5

Alkyl keten dimer, which are used in the first place when the demands on a durable and permanent hydrophobation are. g. reat, can react with the cellulose when the paper or the paper board is being dried wherein beta-ketoesters are established. In the figure below, the reaction between AKD and cellulose and the hydrolyse reaction are illustrated:

10

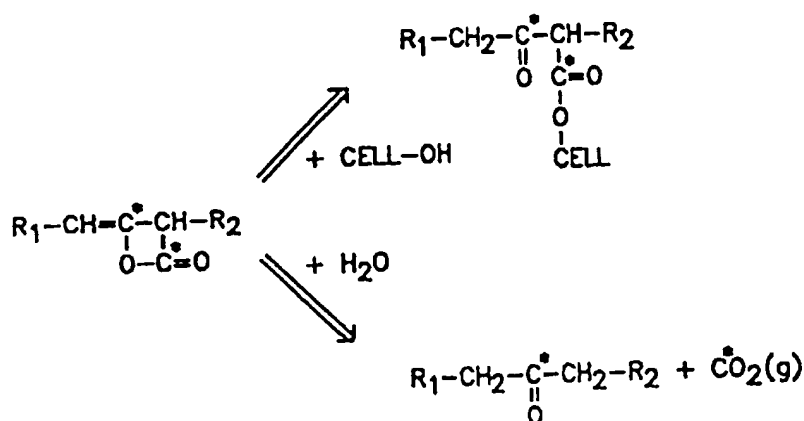

The reaction is slow at low pH values and in practice AKD can not be used other than in the neutral or weakly alkalik pH range. Instead of reacting with the fibre during the paper or paper board manufacturing, AKD also can be hydrolysed such that an unstable beta-keto acid is obtained, which can be decarbonated to corresponding ketone. The hydrolyse products which are formed during the paper manufacturing process, i.e. the ketone products that are obtained, are very disturbing for certain types of photo copying apparatuses, in which these ketones may form depositions.

20 The degree of the hydrolyse reaction for AKD, however, is substantially smaller in  
comparison with ASA.

25 This implies that AKD usually is supplied to the paper or board mill in the form of a dispersion or emulsion which has a particle size of between 0.2 to 2 micrometers. The dispersion or emulsion usually is stabilised by means of a cation-active polymer. This polymer, which also gives the particles their charge, usually consists of cation-active starch but also use of anion-active or amphoteric starches or synthetic polymers occur.

AKD has a melting point of between 15-60°C, depending on the length of the fatty tail. The commercial products which are most commonly used so far often have a mixture of C<sub>14</sub>, C<sub>16</sub>, and C<sub>18</sub> hydrocarbons, implying a melting point of between 40-60°C.

5 AKD is particularly sensitive in the presence of extractive agents of the fatty acid type, because such agents are saponificated at alkalic pH values and also because they compete with the distribution on the cellulose surface. A poor AKD distribution will result in a poor chemical reaction with the fibre. Groundwood, thermo-mechanical pulps and chemi-mechanical pulps therefor are difficult to hydrophobate by means of AKD.

10

The most pronounced drawback with AKD, however, is that the hydrophobicity is developed slowly. A completely developed sizing is not achieved until after several days after the manufacturing in the paper or the board machine

15 Another drawback is that a too large dosage of AKD causes friction problems in connection with the paper or the board/paper board. AKD also impairs the toner addition in connection with the photocopying processes as well as the adherence of the plastic layer in connection with the manufacturing of plastic laminated materials.

20 Alkenyl succinic acid anhydride (ASA) is another example of a so called cellulose-reactive hydrophobation agent. The anhydride can react with the hydroxyl groups of the cellulose, wherein a transesterification takes place. In comparison with AKD, ASA has a much higher reactivity with the cellulose and hence also with water, wherein hydrolysis of the product is a greater problem for ASA than for AKD.


25

ASA is delivered to the paper mill in the form of oil, sometimes with emulgator added. Emulsification takes place in a special emulsification equipment in connection with the paper or board manufacturing machine (so called in situ production) and cationic, anionic or amphoteric starch or other polymer is used as a stabiliser and charge carrier. The particle size of the emulsion usually is 1-5 micrometers. Larger particles are hydrolysed more slowly but smaller particles provides a better distribution on the cellulose fibres, wherefore there exists an optimal particle size. ASA thus is hydrolysed quickly and the hydrolysis product and its salts with Ca<sup>2+</sup> are sticky and frequently give rise to depositions in the paper or paper board manufacturing process. The hydrolysis as well as the reaction velocity are increased with increased pH, but the reaction is fast over the entire pH range. The hydrophobicity is developed fast and is usually fully developed in the finishing part of the paper and paper board manufacturing process.

30

35

Below, the reaction between ASA and cellulose is illustrated:

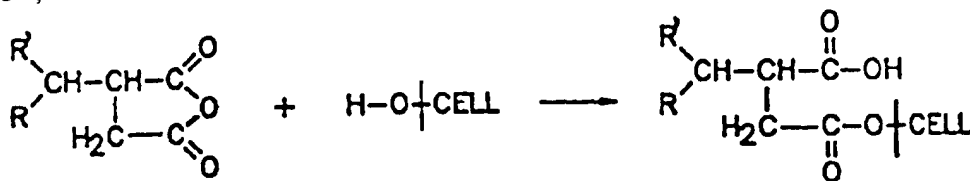

where R or R' is an alkenyl.

- 5 In connection with the more and more common use of precipitated calcium carbonate, so called PCC, as a filler during the paper and paper board manufacturing, the need of a hydrophobic sizing agent is increased considerably for the achievement of the same degree of sizing as is achieved in a corresponding process where e. g. chalk is used as a filler. Moreover, often problem occur which have to do with the fact that the hydropho-
- 10 bation effect is reduced after a period of time.

To sum up, one can thus state that both the two hydrophobation agents have specific advantages and drawbacks when used in the paper or paper board manufacturing process as well as in the finished paper or paper board product.

15

#### DISCLOSURE OF THE INVENTION

- The purpose of the invention is to provide a size composition where the above mentioned problems have been eliminated or restricted. This can be achieved therein that the hydrophobic, cellulose-reactive particles of the emulsion or dispersion exist as a physical mixture of at least two hydrophobic, cellulose-reactive sizing agents. More particularly, the invention according to the elected embodiment is characterised in that said at least two hydrophobic, cellulose-reactive sizing agents comprise at least alkyl keten di-
- 20 mer (AKD) and alkenyl succenic acid anhydride (ASA). By means of this composition there are achieved effects which substantially reduce or eliminate many of the shortcomings which can be related to the known technique. Among these known problems can be mentioned, i. e., slow development of the hydrophobation effect, poor adherence of toner and deposition hydrolysis products in connection with photocopying and reduced efficiency during the paper and paper board manufacturing process because of stops in connection with the formation of hydrolysis products. The size composition is manufactured according to a so called in situ method, i. e. in close connection to the use of the
- 25 composition, i. e. in practise in connection to the machine or those machines which are used for the manufacturing of the paper, the board, or the paper board. This also can be expressed such, that the size composition, according to the invention, in the form of the
- 30

aqueous emulsion or dispersion is prepared not more than 4 hours, preferably not more than 1 hour, suitably not more than 30 minutes, before the use of the composition in the paper, paper board, or board manufacturing process. All known shortcomings in connection with the technique known so far, can surprisingly substantially be reduced or  
5 eliminated through the invention without impairing the favourable features which characterise the two hydrophobic, cellulose-reactive sizing agents taken alone.

Surprisingly, one has also found that the new size composition substantially reduces the sizing problems, such as low hydrophobation effect and reduction of the hydrophobation  
10 effect by time, which occur when precipitated calcium carbonate, so called PCC, is used as filler in the paper and paper board manufacturing process.

A main purpose of the invention therefor is to provide a new and improved composition which can be used for sizing paper, board, paper board and similar products.

15 Another purpose of the invention is to provide a new size composition which is more efficient than previously known compositions, therein that reduced quantities of the sizing agent are required for the achievement of a hydrophobation degree similar to or corresponding to that of the previously known compositions.

20 Still another object of the invention is to provide a new size composition, the sizing influence or sizing ability of which is developed faster than with the previously known compositions.

25 Another purpose of the invention is to provide a new size composition with which the unfavourable effects on the hydrophobation effect are considerably reduced or eliminated in connection with use of precipitated calcium carbonate.

30 Still another purpose is to provide a new size composition, wherein the amount of the undesired hydrolysis products which are obtained in the paper or paper board manufacturing process when the known size compositions are used, are considerably reduced or eliminated.

35 Further there is an object of the invention to bring about an improved method for the manufacturing of a size composition as described above.

Further there is an object to bring about an improved method for the manufacturing of a sized paper or board or paper board, including the use of the new composition of the invention.

- 5 Another object of the invention is to provide sized paper or sized board or sized paper board having improved features by the use of the new composition and the improved process at the manufacturing thereof.

10 According to the invention these and other objectives are achieved through the provision of a size composition in the form of an aqueous (water based) dispersion or emulsion, in which the hydrophobic, cellulose-reactive particles of the emulsion or dispersion exist as a physical mixture of at least two hydrophobic, cellulose-reactive sizing agents, wherein the emulsion also contains starch or other natural polymer and/or at least any synthetic polymer, e. g. polyacrylamide. Preferably, said at least two hydrophobic, cellulose-  
15 reactive sizing agents consist of particles of alkyl keten dimer and alkenyl succenic acid anhydride, wherein the dispersed or emulsified size composition is prepared in connection with the paper and paper board manufacturing process, i. e. shortly before the composition shall be used, preferably not more than 4 hours, suitably not more than 1 hour and most preferably not more than 30 minutes before the use.

20 As far as the new size composition of the invention is concerned, it should be understood that it also may contain further ingredients if desired or if considered suitable, wherein such further ingredients may be chosen according to known principles. Although such ingredients need not be particularly described here in order to make it possible to carry out the invention, it may, however, be mentioned that among normal additions can be mentioned e. g. dispersing agents, aluminium compounds such as alum  
25 (aluminium sulphate) and poly-aluminium chloride. The starch or synthetic polymer existing in the dispersion or emulsion may have a cation-active or anion-active or amphoteric character.

### 30 EXAMPLE

The above described size composition can be prepared in the following way. 25 parts of a wax consisting of alkyl keten dimer (AKD) is melted. The wax usually has a melting point between 30-60°C. depending on the length of the fatty chains in the raw material.  
35 Wax with a melting point down to 15°C also can be used. To this melt there is added 25 parts of an oil consisting of alkenyl succenic acid anhydride (ASA). The mixture is stirred such that a homogenous. physical mixture is achieved. This mixture of AKD and



ASA, during stirring, is added to a solution of 100 parts of cation-active starch and 2 parts of an anion-active dispersion agent and 2500 parts of water in a dispersion/emulsifying device in which it is subjected to so high shear forces that a dispersion or, alternatively, an emulsion is formed. The temperature of the starch solution should  
5 be a few °C higher than the melting point of the AKD/ASA mixture. The dispersion or emulsion thereafter is cooled rapidly. A temperature less than 20°C is preferable.

As previously mentioned, the AKD/ASA ratio can vary very much depending on the features which are desired in the first place. At a low AKD/ASA ratio, the mixture of  
10 AKD and ASA is liquid at room temperature which facilitates the preparation of the emulsion. If desired, the AKD/ASA mixture can be prepared by the supplier of these raw materials. The mixture in that case may be delivered e. g. in a container, wherein the mixture is heated to liquid state e. g. by means of an immersion-heater at a higher AKD/ASA ratio. The mixture also can be delivered as a bulk cargo, wherein its tem-  
15 perature is just above the melt temperature of the mixture during transport and storing. In both these cases the AKD/ASA mixture can be delivered to the user in a concentrated form in order to be prepared at the user's place by being mixed also with starch or other natural polymer and/or with synthetic polymer and being emulsified or dispersed in an aqueous medium shortly before use.

20 In the above described example, it may, as has been previously mentioned, in certain cases be more suitable to use anion-active starch or amphoteric starch or synthetic polymer instead of cation-active starch. Also other additions, such as for example polyaluminium chloride or alum (aluminium sulphate) may be advantageous.

25 The sizing dispersion or sizing emulsion thus obtained is a milky liquid having a low viscosity, which after dilution is dosed to the stock during the course of the paper, board or paper board manufacturing process. Suitably, the size composition may be dosed at any dosage point between the mixing through and the head box. The amount of dosage  
30 may vary depending on different process parameters, such as type of used pulps and fillers, temperature in the system and existence of disturbing substances. Usually the amount of dosage may vary from 0.4 to 1.4 kg total solid content/ton paper, board or paper board.

## PATENT CLAIMS

1. Size composition in the form of an aqueous emulsion or dispersion comprising at least any hydrophobic, cellulose-reactive sizing agent and at least one natural and/or synthetic polymer, c h a r a c t e r i z e d in that the hydrophobic, cellulose-reactive particles of the emulsion or dispersion exist as a physical mixture of at least two hydrophobic cellulose-reactive sizing agents.
2. Size composition according to claim 1, c h a r a c t e r i z e d in that said at least two hydrophobic, cellulose-reactive sizing agents comprise at least alkyl keten dimer (AKD) and alkenyl succenic acid anhydride ASA.
3. Size composition according to claim 2, c h a r a c t e r i z e d in that the ratio between alkyl keten dimer and alkenyl succenic acid anhydride, AKD/ASA, is at least 1/100 and not more than 100/1.
4. Size composition according to claim 3, c h a r a c t e r i z e d in that the ratio between alkyl keten dimer and alkenyl succenic acid anhydride, AKD/ASA, is at least 5/100 and not more than 100/5.
5. Size composition according to any of claims 1-4, c h a r a c t e r i z e d in that it is prepared in a dispersion or emulsifying equipment according to a so called in situ process.
6. Method for the manufacturing of sized paper, sized board or sized paper board, wherein a sizing agent is added during the manufacturing of said paper or board or paper board, suitably to the stock prior to dewatering thereof, c h a r a c t e r i z e d in that the size composition according to any of claims 1-5 is used as said sizing agent.
7. Method according to claim 6, c h a r a c t e r i z e d in that the size composition is added in an amount of at least 0.25 kg and at most 4 kg of total solid content per ton paper, board or paper board.
8. Method according to claim 7, c h a r a c t e r i z e d in that the size composition is added in an amount of at least 0.4 kg and at most 1.4 kg of total solid content per ton paper, board or paper board.

9. Method according to any of claim 6-8, c h a r a c t e r i z e d in that the size composition is prepared not more than 4 hours before it is added during the manufacturing of said paper, board or paper board, suitably to the stock before dewatering thereof.
- 5 10. Method according to claim 9, c h a r a c t e r i z e d in that the size composition is prepared not more than 1 hour, preferably not more than 30 minutes before it is added during the manufacturing of said paper, board or paper board, suitably to the stock before dewatering thereof.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00467

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D21H 21/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4859244 A (JEROME M. FLOYD), 22 August 1989 (22.08.89), abstract; claim 1; example 1, column 2 --	1-10
A	EP 0693589 A1 (EKA NOBEL AB), 24 January 1996 (24.01.96), page 5, claims 1,4 --	1-10
A	US 4743303 A (ULLA HELMER ET AL), 10 May 1988 (10.05.88), claim 1, abstract --	1-10
P,A	WO 9623105 A1 (RAISIO CHEMICALS OY), 1 August 1996 (01.08.96), claims 1-6 -- -----	1-10

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

25 June 1997

Date of mailing of the international search report

14-07-1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Barbro Nilsson  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

03/06/97

International application No.

PCT/SE 97/00467

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4859244 A	22/08/89	DE 3922251 A FI 95163 B,C FR 2634777 A,B JP 2080695 A SE 502115 C SE 8902436 A	15/02/90 15/09/95 02/02/90 20/03/90 21/08/95 07/01/90
EP 0693589 A1	24/01/96	SE 0693589 T3 AT 145026 T AU 671574 B AU 2503195 A BR 9503352 A CA 2154046 A CZ 9501813 A DE 69500081 D,T ES 2094065 T FI 953435 A HU 72004 A HU 9502170 D JP 8049191 A NO 952862 A PL 309656 A SK 89495 A US 5510003 A	15/11/96 29/08/96 07/03/96 27/02/96 21/01/96 14/02/96 27/03/97 01/01/97 21/01/96 28/03/96 00/00/00 20/02/96 22/01/96 22/01/96 07/02/96 23/04/96
US 4743303 A	10/05/88	CA 1270352 A EP 0208667 A,B SE 0208667 T3 SE 455102 B,C SE 8503421 A	19/06/90 14/01/87 20/06/88 11/01/87
WO 9623105 A1	01/08/96	FI 950326 D FI 960345 A	00/00/00 26/07/96